COMPUTER CABLE ASSEMBLIES

PARALLEL PRINTER CABLES

- RS232 25 Pin Male to Centronic 36 Pin Male
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- 25 Wires; 26 AWG Stranded Conductors, an absolute must for bi-directional parallel port
- Ground Indented D-SUB Connectors

26 AWG

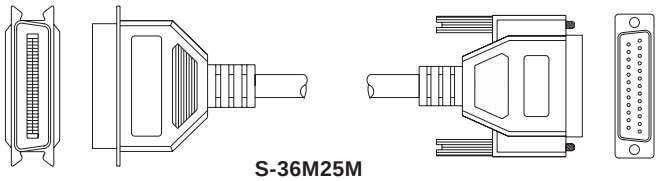

S-36M25M

RS232 Male to Centronic Male

S-36M25M-2’	S-36M25M-6’R
S-36M25M-6’	S-36M25M-10’R
S-36M25M-10’	S-36M25M-15’R
S-36M25M-15’	
S-36M25M-25’	
S-36M25M-50’	
S-36M25M-100’	

** Right Angle=R*

S-36M25M-XX'R

RS232 25 PIN CABLES (Serial)

- RS232 Dual 25 Pin
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- Fully Wired Straight Thru, 26 AWG Stranded Conductors
- For PC Serial Port and/or RS232 Type Applications
- Ground Indented D-Sub Plugs

26 AWG

S-25M

S-25F

25 Pin Male to Female	25 Pin Male to Male	25 Pin Female to Female
S-25MF-2’	S-25MM-2’	S-25FF-2’
S-25MF-6’	S-25MM-6’	S-25FF-6’
S-25MF-10’	S-25MM-10’	S-25FF-10’
S-25MF-15’	S-25MM-15’	S-25FF-25’
S-25MF-25’	S-25MM-25’	S-25FF-50’
S-25MF-50’	S-25MM-50’	S-25FF-100’
S-25MF-100’	S-25MM-100’	

AT SERIAL ADAPTOR CABLES

- RS232 25Pin to 9 Pin
- Adapts Serial Port to RS232 Devices, i.e Modems, Printers
- Molded w/ Thumb Screws
- 9 Wires; 26 AWG Stranded Conductors
- Full Length Mylar Foil Shielded

26 AWG

S-25M9F



S-25M9F

25 Pin Male to 9 Pin Female	25 Pin Male to 9 Pin Male	25 Pin Female to 9 Pin Female
S-25M9F-1’	S-25M9M-3’	S-25F9F-3’
S-25M9F-3’	S-25M9M-6’	S-25F9F-6’
S-25M9F-6’	S-25M9M-10’	S-25F9F-10’
S-25M9F-10’	S-25M9M-15’	
S-25M9F-15’	S-25M9M-25’	
S-25M9F-25’		

PIN OUT

	1	2	3	4	5	6	7	8	9	DB9
DB25	8	3	2	20	7	6	4	5	22	

© 2003 PAN PACIFIC ENTERPRISES CO., INC.