


COMPUTER CABLE ASSEMBLIES



VGA MONITOR CABLES



- VGA Monitor Extension and Adaptor Cable
- High Density 15 Pin Connectors
- Full 15 Conductors; Wired Straight Through
- 26 AWG Stranded Conductors (Unless Noted Otherwise); Mylar Foil Shielded Cable
- Molded w/ Thumb Screws
- XL stands for Extra Long distance
- Coax Style with Ferrite on Each Cable (Unless Noted Otherwise)




Male to Female

- S-H15MF01'(28AWG)
- S-H15MF06'
- S-H15MF10'
- S-H15MF25'

DB9 to High Density 15 Pin

- S-9M15HF-6'
- S-9M15HM-6'
- S-9F15HF-6'
- S-9F15HM-6'

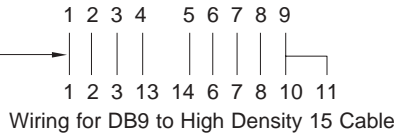

S-H15MMF

Male to Male

- S-H15MM06'
- S-H15MM10'
- S-H15MM25'

Female to Female

- S-H15FF-6'
- S-H15FF-10'

Bulk Cable

- MCC-4.5P3C-2919L2 UL Style 2919, 4.5 Pair 3 Coax, CL2 Rated VGA, 500ft
- MCC-5C-2919-500 UL Style 2919, 5 Mini-Coax, 500ft.
- MCC-5P3C-2919 UL Style 2919, 500ft. Roll
- MCC-7+3C-1354 UL Style 1354, 500ft. Roll -See Below for Detail

Super VGA (Coax Style) Cable

Male to Female

- S-H15MF03'XL
- S-H15MF06'XL
- S-H15MF10'XL
- S-H15MF15'XL
- S-H15MF25'XL
- S-H15MF35'XL
- S-H15MF50'XL
- S-H15MF75'XL
- S-H15MF100'XL

Male to Male

- S-H15MM03'XL
- S-H15MM06'XL
- S-H15MM10'XL
- S-H15MM15'XL
- S-H15MM25'XL
- S-H15MM35'XL
- S-H15MM50'XL
- S-H15MM75'XL
- S-H15MM100'XL

CL2 Rated


- S-H15MM25'XL2
- S-H15MM35'XL2
- S-H15MM50'XL2
- S-H15MM75'XL2
- S-H15MM100'XL2



Non-Ferrite

- S-H15MM10'XLNLF
- S-H15MM15'XLNLF

Cable Style: UL1354 3 elements of 28 AWG Video Coaxial Cables, 7 elements of 24 AWG Control Wires
Shielding, O.D= 9.3±0.5mm
Jacket Color Black

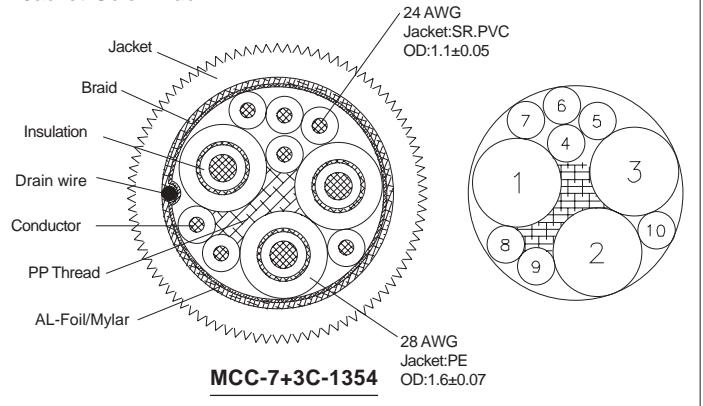

RGB MONITOR CABLES

- Double shielded, Low Voltage Computer Cable
- Gold Plated Contacts
- 75 Ω BNC Connectors
- Color Coded BNC Connections: Red, Green, Blue, Vertical Sync., Horizontal Sync.



* Please call for custom length

S-RGB-03'

RGB Cable, 9 Male/EIAI S-Male, 3ft



S-H15F5BNC-1'

MultiSync, HiDen 15pin, Female, 1ft



S-H15M5BNC-1'

MultiSync, Female BNC VGA, 1ft

S-H15M5BNC-(XX)**

RGB to VGA, HiDen 15pin to 5 BNC

XX= Length(ft): 6, 10, 15, 25, 35, 50.

S-2X5BNC-(XX)'

5 BNC to 5 BNC 75Ω Video Cable

XX= Length(ft): 6, 10, 15, 25, 35, 50, 75, 100.

S-9M4BNC-06'

DB9 to RGB (4 BNC) Monitor Cable, 6ft

S-9M5BNC-06'

DB9M to 5 BNC Cable, 6ft

S-13W3MM-06'

Coaxial D-Sub M/M CBL with Ferrite Core

S-13W3M5BNC-06'

Coaxial D-Sub to RGB (5 BNC) Cable, 6ft

S-13W3M15HM-06'

Coaxial D-Sub to HD15 VGA Male/Male Cable