USB To IEEE-1284 PRINTER CABLE

- Full compliance with the USB spec. 1.0
- Low power consumption and is powered from USB connection.
- Full compatible USB host device drivers available
- Transparent fully automatic support for true bi-directional communication
- Hardware initiates and manages automatic negotiation for the fastest protocol available
- Supports standard PC parallel port register-based operation
- Supports of multiple logical channels
- Maximum throughput: 1.216 Mbytes/s (ECP mode)
- Allows current Microsoft windows printer drivers to print seamlessly to USB
- Fully Plug & Play compatible

AD-USB-C36M

FUNCTION	DESCRIPTION
Power Suplly	Bus Powered from USB Cable
Voltage	+5V
Current	80mA (Max)
Cable Length	6ft (180 cm) AWG 28/24
Input Connector	USB type A plug
Output Connector	Centronics, 36 Pin Male
OperatingTemperature	5 C ~ 40 C
Stock Temperature	-20 C ~ 60 C
Humidity	20% ~ 80% RH, non condensing
Enclosure	Plastic
Weight	110g
Dimension	43 x 53 x 19.5 (mm)

USB HUB

The electronic interface between devices

- Automatically select self-powered or bus-powered model Easy installation of large range self-powered mode
- Surge Protection
- Automatically hand USB protocol
- Support both full speed and low speed devices
- Downstream ports have automatic packet connectivity and speed detection functions
- Higher than 8KV in-circuit ESD protection 8 Advanced USB downstream connection indicators that blink during data transmission
- Compatible with Windows 95, OSR 2.1, Windows 9.8 beta

HUB-USB-2A	1 Host to 2 Devices; 70 x 50 x 25 mm Pocket Style two port HUB. Designed especially for travellers. Used with Note-book Computer for USB system peripheral accessories connection.
HUB-USB2.0-4A	USB V2.0 HUB 1 Port to 4 Ports A
HUB-USB-4A	USB HUB 1 Port B to 4 Ports A
HUB-USB-5A	1 Host to 5 Devices; 125 x 85 x 30 mm
HUB-USB-7A	1 Host to 7 Devices; 125 x 85 x 30 mm
HUB-USB-MNI-2A	Mini USB HUB 2 Ports
HUB-USB-MNI-4A	Mini USB HUB 4 Ports

HUB-USB-4A

HUB-USB-MNI-4A

USB CABLES

- All USB Cables has 22 AWG Signal Pair, 24 AWG Power Pair, and Beige Color Jacket.

S-USBAA0-5' — USB A To B **20 AWG** Power Pair

S-USBAA2-(XX)'
S-USBAB2-(XX)'
S-USBAMF2-(XX)'
S-USBBB2-(XX)'

USB A To B 22 AWG Power Pair

M-USBAB4-(XX)'
M-USBAMF4-06'

USB 24 AWG Power Pair

For More Detales and Length See Page 72.

USB ADAPTORS

AD-USB-AFMD6M	USB Type A Female To PS2 Male
AD-USB-AM/MD6F	USB Type A Male To PS2 Female
AD-USB-AFBF	USB Type A Female To Type B Female
AD-USB-AFBM	USB Type A Female To Type B Male
AD-USB-AMBF	USB Type A Male To Type B Female
AD-USB-AFF	USB Type A Female To Type A Female
AD-USB-AMM	USB Type A Male To Type A Male
AD-USB-BFF	USB Type B Female To Type B Female
AD-USB-BMM	USB Type B Male To Type B Male

USB BRACKET

- Dual Port with Bracket,
- To main Board's USB Connection
- USB A Type Jack

BRK-USB-AA2

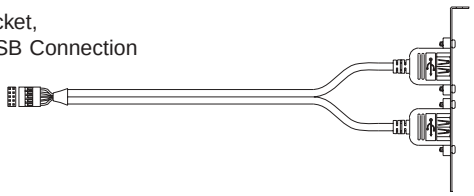

AD-USB-AFMD6M

AD-USB-AM/MD6F

© 2003 PAN PACIFIC ENTERPRISES CO., INC.