




PCB MOUNT HEADERS & SIMM SOCKETS

HEADER SOCKETS (.1"X.1")

- Gold Plated Contacts
- For parallel and perpendicular board stacking
- PCB to Harness and PCB to Chassis connections

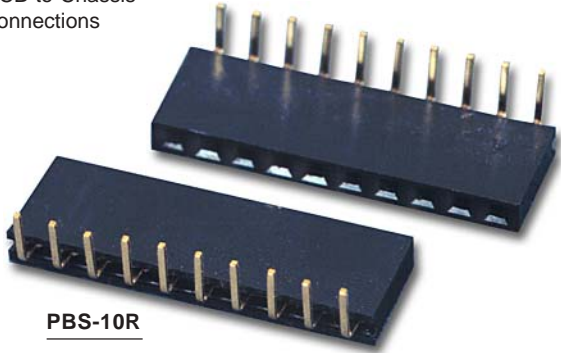

PBS-10R

Straight

Single Row	Dual Row
<u>PBS-02S</u>	<u>PBD-2X2S</u>
<u>PBS-03S</u>	<u>PBD-2X3S</u>
<u>PBS-04S</u>	<u>PBD-2X4S</u>
<u>PBS-05S</u>	<u>PBD-2X5S</u>
<u>PBS-06S</u>	<u>PBD-2X6S</u>
<u>PBS-07S</u>	<u>PBD-2X7S</u>
<u>PBS-08S</u>	<u>PBD-2X8S</u>
<u>PBS-09S</u>	<u>PBD-2X9S</u>
<u>PBS-10S</u>	<u>PBD-2X10S</u>
<u>PBS-20S</u>	<u>PBD-2X13S</u>
<u>PBS-30S</u>	<u>PBD-2X17S</u>
<u>PBS-40S</u>	<u>PBD-2X20S</u>
	<u>PBD-2X25S</u>
	<u>PBD-2X30S</u>
	<u>PBD-2X40S</u>


Right Angle

Single Row	Dual Row
<u>PBS-02R</u>	<u>PBD-2X2R</u>
<u>PBS-03R</u>	<u>PBD-2X3R</u>
<u>PBS-04R</u>	<u>PBD-2X4R</u>
<u>PBS-05R</u>	<u>PBD-2X5R</u>
<u>PBS-06R</u>	<u>PBD-2X6R</u>
<u>PBS-07R</u>	<u>PBD-2X7R</u>
<u>PBS-08R</u>	<u>PBD-2X8R</u>
<u>PBS-09R</u>	<u>PBD-2X9R</u>
<u>PBS-10R</u>	<u>PBD-2X10R</u>
<u>PBS-20R</u>	<u>PBD-2X17R</u>
<u>PBS-30R</u>	<u>PBD-2X20R</u>
<u>PBS-40R</u>	<u>PBD-2X30R</u>
	<u>PBD-2X40R</u>

* Inquire for other available contacts

POWER PLUG

- Tin Plated Phosphor Bronze Contact
- Nylon Housing
- Friction Lock

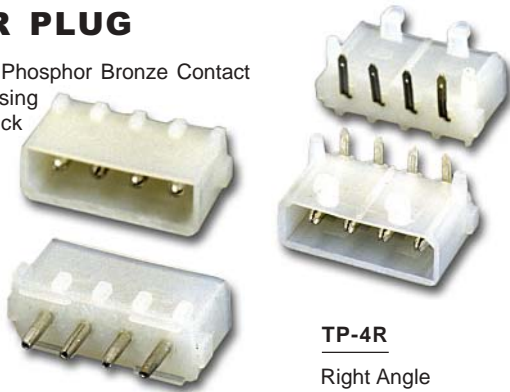

TP-4S


Straight

TP-4R

Right Angle

POWER HOUSING

- 4 Circuits Nylon Housing
- 18 - 22 AWG
- Mates With 0.084 " Crimp Terminal
- PC Type Internal Power Connector

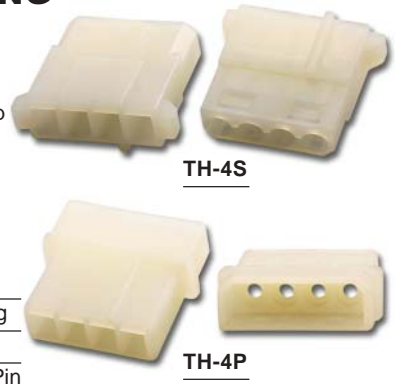

TH-4S

<u>TH-4P</u>	Male Housing
<u>TH-4S</u>	Female Housing
<u>TH-P/M</u>	Male Crimp Pin
<u>TH-P/F</u>	Female Crimp Pin

TH-4P

SIMM SOCKETS

- Sockets for Single Inline Memory Modules
- Tin Plated Contact
- Reliable Retention Clip
- Both Straight & Angled (LP: Low Profile) Configuration
- Single & Dual Rows

Low Profile

<u>SIM-1X30LP</u>	Single Row
<u>SIM-2X30LP</u>	Dual Row


<u>SIM-1X30</u>	Vertical Single Row
<u>SIM-2X30</u>	Vertical Dual Row
<u>SIM-1X72</u>	Vertical Single Row



SIM-1X30



SIM-2X30LP



SIM-2X30