

# PCB MOUNT SOCKETS



## IC SOCKETS (Stamped Pins)

- Tin Plated, Stamped Contacts
- 0.1" (2.54mm) Pin Spacing
- Two Different Row Widths
- Narrow : A = 7.62 mm (0.3")
- Wide : A = 15.20 mm (0.6")

### Narrow (0.3")

- SCS-06
- SCS-08
- SCS-14
- SCS-16
- SCS-18
- SCS-20
- SCS-22
- SCS-24
- SCS-28
- SCS-34

### Wide (0.6")


- SCL-24
- SCL-28
- SCL-32
- SCL-40

### Multi Row

- SCS-34
- SCS-38

### IC EXTRACTOR

- SCS-IC-XTR



SCS-08



## CHIP CARRIERS



- Gold Plated Contacts & Solder Post
- Plastic Leaded Chip Carrier
- Surface Mount Chip Carrier

### Thru Hole

- PLCC-28
- PLCC-32
- PLCC-44
- PLCC-52
- PLCC-68
- PLCC-84

### Surface Mount

- SMT-28 NT
- SMT-32 NT
- SMT-44 NT
- SMT-52 NT
- SMT-68 NT
- SMT-84 NT



PLCC-28T Tin Plated Contacts


SMT-52 NT

## PIN SOCKETS (Machined Pins)

- Gold Plated, 4 Finger Beryllium Copper Contacts
- Tin Plated Outer Sleeve
- 0.10" (2.54mm) Pin Spacing
- Notched Sides For Cleaner Breaking



HQ-1X40



- HQ-1X16
- HQ-1X20
- HQ-1X30
- HQ-1X40
- HQ-2X30
- HQA-1X40—Wire Wrap Pins

## RIGHT ANGLE PCB MOUNT DIN SOCKET

- 90 Degree Right Angle PCB Mount
- Tin Plated Solder Post
- Thru Hole, Suggest Hole Pattern Available
- 5pin PCB mount socket




DIN-5500-5S

### NON-SHIELD

- DIN-5500-3S
- DIN-5500-4S
- DIN-5500-5S (180°)
- DIN-5500-6S
- DIN-5500-7S
- DIN-5500-8S

### SHIELD

- DIN-5500-3SS
- DIN-5500-4SS
- DIN-5500-5SS (180°)
- DIN-5500-6SS
- DIN-5500-7SS
- DIN-5500-8SS




\*Non-Stock, Special Order


Other number of pins available, please call.

## IC SOCKET (Machined Pins)

- Gold Plated, 4 Finger Beryllium Copper Contacts
- Tin Plated Outer Sleeve
- Pin Spacing:
  - 8-24= 2.54 mm x 7.62 mm (0.1" X 0.3")
  - 24-40= 2.54 mm x 15.24 mm (0.1" X 0.6")

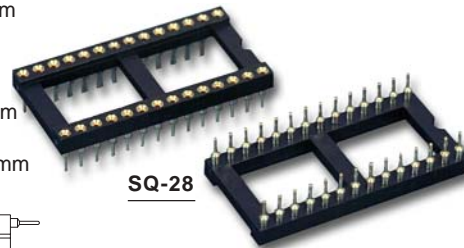

SQ-28



### Regular

- SQ-06 2.54 mm x 7.62 mm
- SQ-08 (0.1" X 0.3")
- SQ-14
- SQ-16
- SQ-18
- SQ-20
- SQ-22
- SQ-24N
- SQ-24 2.54 mm x 15.24 mm
- SQ-28 (0.1" X 0.6")
- SQ-40

### Wire-Wrap

- SQA-06 Width: 7.62mm
- SQA-08
- SQA-14
- SQA-16
- SQA-18
- SQA-20
- SQA-24 Width: 15.24mm
- SQA-28
- SQA-40