Model 6320
Two Bantam Plugs To RJ45 / RJ48

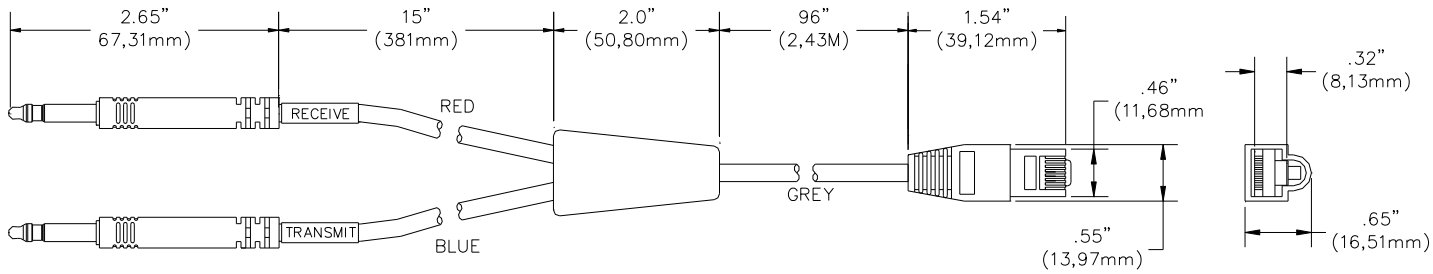

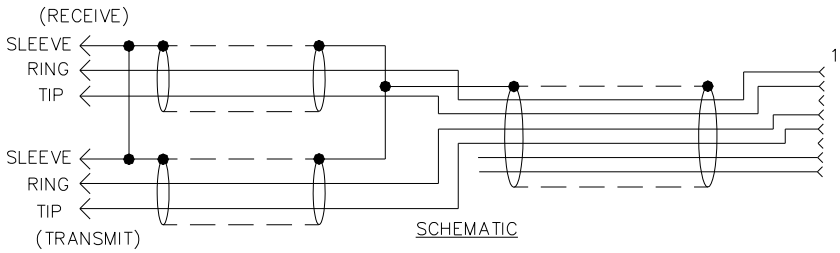

FEATURES:

- ✓ Shielded cable to reduce noise.
- ✓ Bantam Plugs molded to the cable to provide optimum durability.

MATERIALS:

Plugs: Nickel Plated Brass.
Main Cable: 4 Conductor Shielded Twisted Pair.
Breakout Cables: 2 Conductor Shielded Twisted Pair.
Wire Jackets and Insulators: PVC
Breakout: Molded PVC

RATINGS:

Voltage: Hands free usage in controlled voltage environments: 300 Vrms Max. *For CE compliance*: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.
Current: 0.5 Amperes per conductor @ 25°C Max.
Operating Temperature: -4°F to +176°F (-20°C to +80°C)

ORDERING INFORMATION: Model 6320-96
Standard Length: 96" Inches (2,43M)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.