


Tips for Controlled Output Soldering Irons

CT Series Tips for W60P and W100P Irons

- Tips are solid copper plated with iron all over, and nickel and chromium behind the working surface
- Designed to provide maximum heat transfer from the heater to the tip
- CT5 series for WP60P soldering irons
- CT6 series for WP100P soldering irons
- Individually bagged
- *indicates available bulk (100 multiples only); add suffix "B" to catalog number (eg. CT6E7B) www.action-electronics.com

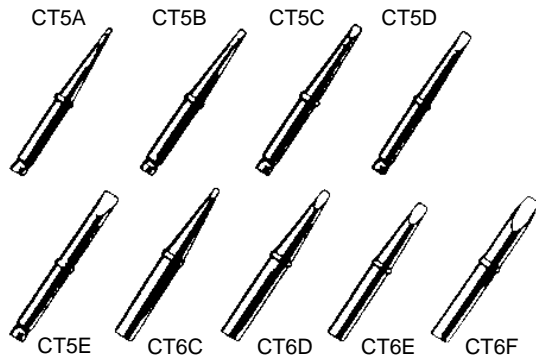

600°F (315°C)		700°F (371°C)		800°F (427°C)		Description	Tip size		Reach		Pack Wt.		Shelf Pack
Cat. No.	UPC No. 037103	Cat. No.	UPC No. 037103	Cat. No.	UPC No. 037103		Inch	mm	Inch	mm	lb	kg	
CT5A6	472618	CT5A7	472625	CT5A8	472632	W60P Screwdriver tip	0.062	1.58	1.15	29.36	0.43	0.19	10
-	-	CT5B7	472656	CT5B8	472663	W60P Screwdriver tip	0.093	2.38	1.15	29.36	0.43	0.19	10
CT5C6	472670	CT5C7	472687	CT5C8	472694	W60P Screwdriver tip	0.125	3.17	1.15	29.36	0.43	0.19	10
-	-	CT5D7	472724	CT5D8	472731	W60P Screwdriver tip	0.187	4.74	1.15	29.36	0.43	0.19	10
-	-	CT5E7	472755	CT5E8	472762	W60P Screwdriver tip	0.250	6.35	1.15	29.36	0.43	0.19	10