


## Foot Candle/Lux Meter

Accurate light level measurements plus analog output

### Features:

- Accurately displays light level in terms of Fc or Lux over three ranges: Fc (0-200, 0-2000 and 0-5000Fc) and Lux (0-2000, 0-20000, 0-50000Lux)
- Resolution of 0.1Fc or 1Lux with 5% accuracy
- Select fast (1 second) or slow (2 seconds) response
- Monitor light levels using outputs; 1mV per count analog output for capturing readings to a recorder
- Utilizes precision photo diode and color correction filter; Cosine/color corrected
- Dimensions: 6.4x2.8x1.2" (163x70x30mm); Weight: 7.8oz (220g)
- Complete with 9V battery

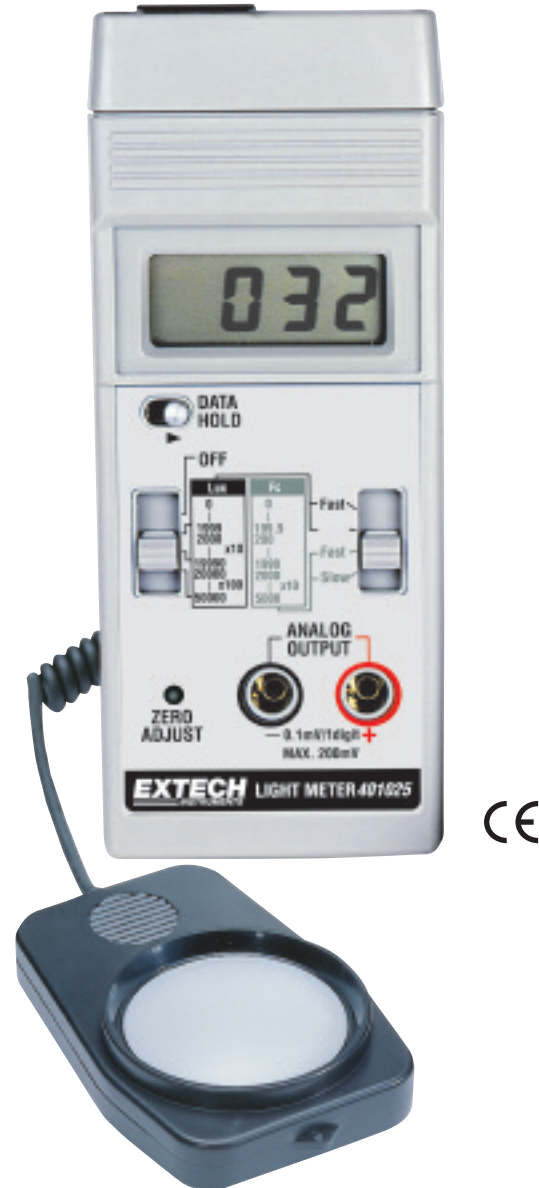

### Ordering Information:

**401025** .....Foot Candle/Lux Meter

**401025-NIST** ..Foot Candle/Lux Meter with NIST Certificate

**409996** .....Vinyl Pouch Carrying Case