Model 2630
Breakout: BNC (Female) To Alligator Test Clips

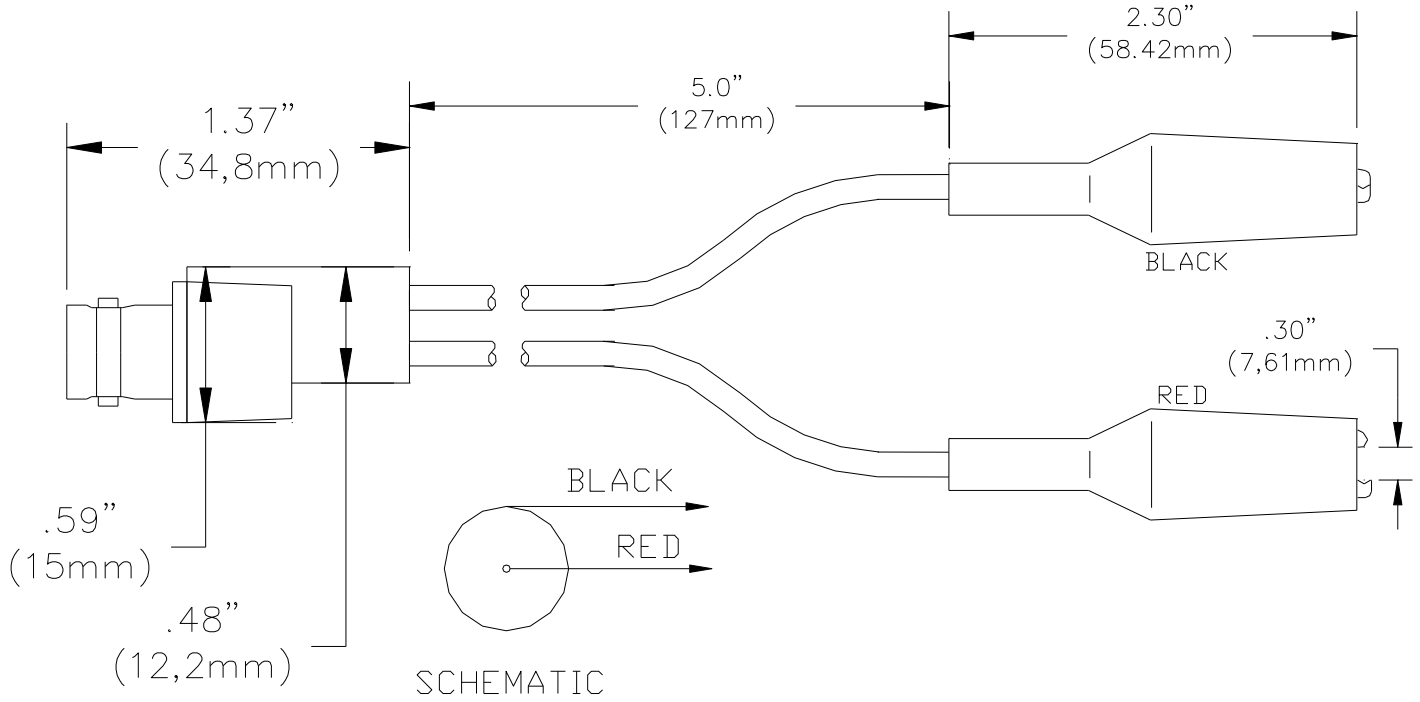

FEATURES:

- ✓ Converts BNC (male) cables / connectors to alligator test clips for test versatility.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.
- ✓ Alligator clips attach to terminals up to .300" (7.6mm) diameter.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper
Dielectric: PTFE
Wire: 18 AWG, PVC Insulated
Alligator: Nickel plated steel, Spring: stainless steel
Boot: Vinyl, color matches color of wire.

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 150 VRMS Max.
Operating Temperature: +122°F (+50°C) Max.

ORDERING INFORMATION: Model 2630*
* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.